

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 694 202 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

26.11.1997 Bulletin 1997/48

(21) Application number: 95907934.4

(22) Date of filing: 05.01.1995

(51) Int Cl.⁶: H01F 7/02, H02K 7/09

(86) International application number:
PCT/US94/13781

(87) International publication number:
WO 95/22829 (24.08.1995 Gazette 1995/36)

(54) MAGNETIC LEVITATION DEVICE AND METHOD

MAGNETSCHWEBEGERÄT UND VERFAHREN

DISPOSITIF ET PROCEDE DE LEVITATION

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: 17.02.1994 US 197845

(43) Date of publication of application:
31.01.1996 Bulletin 1996/05

(73) Proprietor: CREATIVE GIFTS, INC.
Seattle, WA 98166 (US)

(72) Inventors:
• HONES, Edward, W.
Los Alamos, NM 87544 (US)

• HONES, William, G.
Seattle, WA 98166 (US)

(74) Representative: Ritscher, Thomas, Dr.
RITSCHER & SEIFERT
Patentanwälte VSP
Kreuzstrasse 82
8032 Zürich (CH)

(56) References cited:
FR-A- 1 595 792 US-A- 2 323 837
 US-A- 4 382 245 US-A- 4 427 960

EP 0 694 202 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The present invention relates to a magnetic levitation device and a method of levitating a magnet.

Magnets, both permanent magnets and electromagnets, find a wide variety of uses, both practical and as entertainment devices. The poles of magnets have been named the north pole and the south pole, the north pole being the one that points northward in the Earth's magnetic field, i.e., the magnetic north-seeking pole. It is, of course, well known that like poles, i.e., two north poles, repel one another and unlike poles, i.e., a north pole and a south pole, attract one another.

This phenomenon has been used to levitate one magnet above another, e.g. as in US-A-4 427 960 for a magnetic holder for small articles, such as power clips, and offers the possibility of substantially reduced friction. Magnetic levitation of trains, for example, as disclosed in FR A-1 595 792 is one practical application of the phenomenon. However, in such a levitation application, highly sophisticated control devices are required for controlling the magnetic fields of electromagnets to overcome the inherent instabilities of the repulsion forces of two like magnetic poles. In a simple levitation system wherein one pole of a first permanent magnet is attempted to be suspended above a like pole of a second permanent magnet, the inherent instability of such a system results in the flipping over of the first magnet so that the unlike poles attract and are brought together into a stable configuration.

A number of simple magnetic levitation systems have been devised which employ specially configured permanent magnet arrangements intended to minimize the instability associated with magnetic levitation. In U.S.-A- No. 2,323,837 to Neal, for example, there is disclosed a magnetic system having a base magnet comprising a circular disk in which a first plurality of cylindrical magnets is disposed in a circular array about the axis of the circular disk. An upper magnet member comprising a spherical segment in which a second plurality of cylindrical magnets is disposed in a circular array of smaller diameter than the diameter of the circular array of the base magnet. The first plurality of magnets is disposed with like (north) poles and longitudinal axes directed vertically upwardly or inclined slightly toward the axis of the circular disk. The second plurality of magnets is disposed with like (north) poles and longitudinal axes directed vertically downwardly or inclined at the same inclination as the first plurality of magnets. This arrangement of the base magnet is said to produce an inverted magnetic field cone which embraces the smaller diameter magnetic field of like polarity of the upper magnet and thereby is said to stabilize the levitation system.

U.S.-A-4,382,245 to Harrigan discloses another simple magnetic levitation system which utilizes a dish-shaped lower magnet to magnetically support or levitate a magnetic top spinning coaxially above the lower magnet. The dish-shaped or concave surface of the lower

magnet is said to produce radially inwardly directed lines of magnetization which, together with the gyroscopic effect of rotation of the magnetic top, provide stabilization of the levitation system. The Harrigan patent discloses

5 another embodiment in which stabilization is said to be provided by a combination of the concave lower magnet surface and a pendulum effect resulting from a non-magnetic mass supported below the lower magnet on an arm extending from the upper magnet through a central bore in the lower magnet. Other embodiments are disclosed in which the lower field is not provided by a dish-shaped magnet but is provided by a plurality of cylindrical magnets arranged similarly to the arrangement of the aforementioned Neal patent.

10 15 The essence of the Harrigan patent seems to reside in the teaching that the magnetic field above the center of the base magnet should be focussed, but no commercially feasible device has resulted therefrom.

Accordingly, it is the object of the present invention
20 to provide for a magnetic levitation device that can be produced and sold commercially, e.g. for educational or amusement purposes, and can be readily manufactured at low cost and operated simply, reliably and reproducibly with minimal instruction.

25 This object is achieved according to a first embodiment of the invention by a magnetic levitation device having the features specified in claim 1. Preferred embodiments of the device according to the invention have the features of claims 2-14.

30 According to a second embodiment the invention provides for a method of gyroscopically levitating a magnet comprising the steps specified in claim 15.

Preferred method embodiments are defined in claims 16-20.

35 Generally, the invention described herein makes use of a uniformly magnetized flat or substantially planar magnetic base above which is caused to float or levitate a spinning magnetic top comprising a flat ring magnet, a nonmagnetic spindle and one or more nonmagnetic
40 washer-shaped weights. Both the base magnet and the magnet of the top are preferably sheet-like materials magnetically polarized normal to their horizontal or flat surfaces and their magnetic fields are arranged in opposition. Sheet-like materials magnetized in this way are

45 referred to as magnetic shells. The magnetic strength, S, of a shell is defined as the magnetic moment per unit area of its surface, i.e., the number of unit poles per unit area times the thickness of the shell. The magnetic field of a uniformly magnetized shell is the same as would be

50 produced by an electric current flowing around the periphery of the shell, the current intensity, i, in abamperes, being numerically the same as the strength, S, of the shell. All shells of the same uniform strength and the same outer periphery give rise to the same field at all

55 outside points. In other words, the profile or shape of the surface of the shell is immaterial. Making the surface of the base magnet concave instead of flat does not provide a magnetic centering force above the base magnet.

A previously unrecognized characteristic of the magnetic field above a magnetic shell is that the shape of the outer periphery of a shell affects the stability of a levitation system using the shell. In particular, a magnetic shell with a polygonal shaped periphery, especially a rectangular or a square shaped periphery, has a region located a few centimeters above the surface of the shell and along the diagonals of the polygonal shape where the magnetic field gradients are such as to provide both lifting and centering forces on a magnetic dipole positioned in that region. Other non-polygonal shapes, such as circular, elliptical, etc. do not appear to provide a region where both lifting and centering forces exist.

With the foregoing and other advantages and features of the invention that will become hereinafter apparent, the nature of the invention may be more clearly understood by reference to the following detailed description of the invention, the appended claims and to the several views illustrated in the drawings.

Brief Description of the Drawings

FIG. 1 is a graphic illustration of a magnetic dipole $+m, -m$ of length l and the coordinates r and θ used to define the location of a point P in the magnetic field around the dipole;

FIG. 2 is a graphic illustration of the magnetic field of a circular current loop with a magnetic dipole $+m, -m$ located near the axis of symmetry of the field; FIG. 3 is a graph showing the calculated magnitudes of the vertical gradient (dH_z/dz) of the vertical component (H_z) of the magnetic field versus the distance (z) above a 10 cm square permanent magnet at increasing distances (h) from the central axis of the magnet along a diagonal of the square;

FIG. 4 is a graph showing the calculated magnitudes of the vertical gradient (dH_x/dz) of the horizontal component (H_x) of the magnetic field versus the distance (z) above a 10 cm square permanent magnet at increasing distances (h) from the central axis of the magnet along a diagonal of the square; FIGS. 5-9 are perspective views showing one embodiment of the magnetic levitation device of the present invention and the method steps in operating the device of the invention;

FIG. 10 is a perspective view of other embodiments of the magnetic levitation device of the present invention; and

FIG. 11 is a perspective view of still other embodiments of the magnetic levitation device of the present invention.

Detailed Description of the Invention

While the present invention is not intended to be limited thereby, the following explanation of the operation of the invention will aid in understanding the invention.

Referring first to FIG. 1, there is graphically illustrated a magnetic dipole 2 of length l having a north pole ($+m$) and a south pole ($-m$). The dipole 2 is said to have a magnetic moment M equal to the product ml . Magnetic moment M is a vector having a direction from $-m$ to $+m$ along the axis of dipole 2. The magnetic field surrounding the magnetic dipole is given by:

$$10 \quad H_r = 2M \cos \theta / r^3 \quad (1)$$

$$H_\theta = M \sin \theta / r^3 \quad (2)$$

15 where M is the magnetic moment of the dipole; r and θ define the point in space relative to the dipole at which the field is measured; and H_r and H_θ are the components of the field, in gauss, in the directions of increasing r and increasing θ .

20 Equations (1) and (2) above also define the magnetic field produced by a circular loop of electric current where M is the product of the current i in the loop and the area A of the loop and is known as the magnetic moment of the current loop.

25 It has been very difficult to achieve levitation of one permanent magnet above another permanent magnet without using some form of mechanical restraint to keep 30 the levitated magnet stable, i.e., prevent it from sliding sideways and/or flipping over. This situation is illustrated in FIG. 2. A circular loop of current, i , lies in the x - y plane. The magnetic field produced by the current is shown by 35 magnetic field lines emerging along a diameter d of the loop i . (By convention the direction of the magnetic field is the direction of the force the field exerts on a north (+) pole). The field lines diverge (i.e., the field becomes weaker) with increasing height above the current loop i . A dipole 2 ($+m, -m$) is shown located near the axis of 40 symmetry of the field and is tilted by an angle, α , away from the vertical. The field causes an upward force on $+m$ and a downward force on $-m$. These forces produce a torque tending to rotate the dipole clockwise. The torque T is, approximately:

$$45 \quad T = H_z ml \sin \alpha = H_z M \sin \alpha \quad (3)$$

Note that the torque increases as α increases. The 50 dipole 2 is unstable in the position shown and will flip over, putting the south pole ($-m$) downward to achieve a stable configuration. The dipole 2 also experiences a net upward force when oriented as shown because in the upwardly decreasing field, the upward force on $+m$ is greater than the downward force on $-m$. The net upward force is given by:

$$F_z = M \cos\alpha \frac{dH_z}{dz} \quad (4)$$

There is also a net sideways force in the X direction given by:

$$F_x = M \cos\alpha \frac{dH_x}{dz} \quad (5)$$

If H_x increases with z , the net sideways force will be directed toward the axis of the field, i.e., there will be a centering force, keeping the dipole from sliding sideways out of the field. The upward and sideways forces, or translational forces, on the dipole are proportional to the spatial rate of change (i.e., the gradient) of the field, not to the magnitude of the field. In a perfectly uniform field, the dipole 2 would experience no translational force even if the field were very intense; it would experience only the torque.

According to the present invention, a previously unrecognized characteristic of the magnetic field above a magnetic shell is exploited, namely, that there can be a region a few centimeters above the surface of the shell where the gradients are such as to provide both a lifting (dH_z/dz negative) force and a centering (dH_x/dz positive) force on a magnetic dipole. This characteristic is illustrated in FIGS. 3 and 4 with respect to a 10 cm square magnetic shell. In those Figures, curves showing dH_z/dz (FIG. 3) and dH_x/dz (FIG. 4) are plotted versus height z for points spaced 0.5 cm apart along a diagonal of a 10 cm square magnetic shell of strength 780 unit poles per cm^2 . In FIG. 3 dH_z/dz reaches a maximum negative value at all radial locations, this maximum value being greater and its vertical location being lower at increasing distances from the center of the square ($h = 0.0 \text{ cm}$). As shown in FIG. 4, the dH_x/dz curves all have positive, i.e., centering, values at vertical distances below about 2.3 cm along the diagonals of the square.

Now, assume that a dipole, such as a small, thin ring magnet magnetized through its thickness, is raised up (increasing z) from the magnetic shell along the axis thereof. The upward force on the magnet increases until the peak negative gradient dH_z/dz is reached, after which the force decreases. The peak dH_z/dz for each distance h marks the height where the maximum weight dipole can be levitated against gravity. A dipole having a weight somewhat less than this maximum would be lifted by the magnetic field up past the peak dH_z/dz and then would be levitated some small distance above that point. If dH_x/dz is negative at that point, e.g., $z > 2.3 \text{ cm}$ in Fig. 3, the dipole will slide sideways out of the field because of the absence of a positive centering force or field along the diagonal of the base magnet. Thus, the region of possible stable levitation is below $z > 2.3 \text{ cm}$, and the curves of FIGS. 3 and 4 suggest that the inner radius of the ring magnet should be no less than about 2 cm and the outer radius could be as much as 3 cm.

With those dimensions, the ring would float and be centered (i.e., would not slip sideways out of the field).

The calculated magnetic field of a circular magnetic shell results in no overlap of the centering region and the maximum negative dH_z/dz , that is, the limiting height of the centering region (i.e., the height where dH_x/dz changes from positive to negative) lies below the peak (dH_z/dz negative) force at all radial distances corresponding to distance h . Thus, levitation of a permanent magnet over a circular base permanent magnet is not possible. Examination of a permanent magnet of other shapes, e.g., triangular, x-shaped, has shown that the square is near the optimal shape.

Even though, potentially and theoretically, a ring magnet will levitate and stay centered above the 10 cm square magnetic shell base discussed above, if left unrestrained the ring magnet will flip over and fall to the base magnet. The restraint to prevent this lies in spinning the ring magnet about its axis and relying on gyroscopic action to keep it from flipping. If the ring magnet is spun faster than a certain angular velocity it will spin upright above the base without wobbling. As its speed decreases due to air friction, the ring magnet will begin to nutate and precess until it eventually flips over. The critical rotation speed above which the ring magnet will levitate in a stable condition and below which it will start nutation is given by:

$$\Omega^2 = 4MH_{\text{z}}I_x/I_z^2 \quad (6)$$

where

Ω = spin rate (radians/sec);
 M = magnetic moment of the ring magnet;
 H = intensity of the magnetic field produced by the base;
 I_x = moment of inertia of the ring magnet about its diameter, $I_x = m(r_1^2 + r_2^2)/4$;
 I_z = moment of inertia of the ring magnet about its axis of symmetry, $I_z = m(r_1^2 + r_2^2)/2$; and
 r_1 and r_2 are the inner and outer radii of the magnetized ring and m is its mass.

For the dimensional parameters used herein to describe the present invention, spin rates of about 20 revolutions/sec are required to prevent the ring magnet from flipping over.

A preferred embodiment of the invention is shown in FIG. 5. A first or base ceramic magnet 10 having a square periphery 10 cm on a side and a thickness of about 0.7 cm is disposed horizontally on a surface T. Magnet 10 is magnetized normal to its large surface area with (for description purposes) its north (+) pole oriented upwardly. A non-magnetic lifter plate 12, such as a transparent plastic sheet, rests on the base magnet

10 with an edge 11 extending beyond the base magnet 10. On the lifter plate 12 a top 13 is held by the hand H of a user for operation in the manner described herein-after. Top 13 comprises a second magnet, such as a ceramic ring magnet 14 with (for description purposes) its north (+) pole oriented downwardly toward the like north pole of the first or base magnet 10. A spindle 18, preferably made of a non-magnetic material, is fitted tightly into the central hole of ring magnet 14 for manually imparting spin to the ring magnet 14. One or more non-magnetic washers 16 are placed over the spindle 18 and fit snugly on the spindle 18 in the manner shown in FIG. 5. Washers 16 are used for weight adjustment of the magnetic top 13 as described in more detail hereinafter. Top 13 is held against the lifter plate 12 above the geometric center G of base magnet 10 and is spun, either by hand or by another appropriate mechanism, such as a cord.

Referring now to FIG. 6 which shows top 13 spinning clockwise, the user grips and raises lifter plate 12 vertically upwardly in the direction of arrow 20. The user lifts the plate 12 slowly by hand until the spinning top 13 approaches the height of maximum negative gradient of the vertical component of the magnetic field. Now referring to FIG. 7, the top 13 has passed through the height of maximum negative gradient (dH_z/dz) which causes it to lift or levitate upwardly in the direction of arrow 22 off the surface of lifter plate 12. As shown in FIG. 8, the lifter plate 12 may then be removed, e.g., in the direction shown by arrow 24. The spinning top 13 will remain levitating or floating above the geometric center G of base magnet 10 as shown in FIG. 9 until the rotation rate of the top 13 drops below that which will maintain the system stable.

If the top 13 does not lift itself off the lifter plate 12 as shown in FIG. 7, it is too heavy and one or more washers 16 should be removed before the procedure is repeated. If the top 13 suddenly jumps off the lifter plate 12 becomes unstable and falls, the top is too light and one or more washers 16 should be added to the spindle 18 before the procedure is repeated. When the top is correctly weighted, it will rise gently off the lifter plate 12 as the peak negative dH_z/dz is approached and levitate. In actual operation, the top 13 will levitate or float for several minutes during which time it precesses, nutates and moves gently up-and-down and from side-to-side until it slows and falls onto the base magnet.

Further embodiments of the invention are illustrated in FIG. 10. These embodiments are substantially the same as the embodiment shown in FIGS. 5-9 except that the height at which the top 13 levitates can be increased by as much as 100%. This is accomplished by weakening the magnetic field at the geometric center G' of the base magnet 10'. A weakened magnetic field at the center G' may be achieved either by cutting a central hole 26 (shown in dashed lines) in the base magnet 10' or by mounting a magnet disk 28 of opposite polarity, i.e., with its south (-) pole oriented upwardly over the geo-

metric center G' of the base magnet 10'. Disk 28 may be adhesively bonded or otherwise affixed to magnet 10'.

Referring now to FIG. 11, still other embodiments 5 of the invention are shown wherein an electromagnetic 30, such as a wire conductor 32 formed into a polygonal (square) shape is used for the base magnet instead of a permanent magnet. On one side of electromagnet 30, the conductor 32 is bent downwardly to form closely spaced terminal ends 34, 36 across which a DC voltage 10 is applied to create a magnetic field similar to the magnetic field of magnet 10 of FIGS. 5-9. A magnet top 40 which may be identical to top 13 is levitated above electromagnet 30 according to the same method described 15 above in connection with FIGS. 5-9.

Optionally, another magnet 42 shown in dashed lines 20 may be located at the geometric center E of electromagnet 30 for the same purpose as magnet 28 or hole 26 in the FIG. 10 embodiment. Magnet 42 may be a small electromagnet or a permanent magnet of circular, polygonal or other suitable shape with its field direction oriented opposite to the field direction of electromagnet 30.

Those skilled in the art will appreciate that using a 25 stronger magnetic material or a stronger electromagnet will permit the use of a heavier top with a greater moment of inertia to thus reduce the stable spin rate and increase the levitation time of the system.

Although certain presently preferred embodiments 30 of the invention have been described herein, it will be apparent to those skilled in the art to which the invention pertains that variations and modifications of the described embodiment may be made without departing from the spirit and scope of the invention. Accordingly, 35 it is intended that the invention be limited only to the extent required by the appended claims and the applicable rules of law.

40 Claims

1. A magnetic levitation device comprising a base including a first magnet, and a gyroscopic top including a second magnet for rotating motion of the gyroscopic top above, and distanced from, the base magnet, when the gyroscopic top is rotated, characterized in that the first magnet (10) has a substantially planar first surface having a first axis and a polygonal periphery, said first magnet (10) being magnetized normal to the first surface and parallel to the first axis such that the first surface has a first polar orientation; and that the second magnet (14) has a second axis and a second surface, said second magnet (14) being magnetized normal to the second surface and parallel to the second axis such that the second surface of the second magnet (14) has the same polar orientation as the first surface of the first magnet (10), and means (18) for ro-

- tating said second magnet about the second axis.
2. The device of claim 1 wherein the periphery of the first magnet (10) is square. 5
3. The device of claim 1, wherein the first and the second magnet (10; 14) each comprise ceramic magnets.
4. The device of claim 1, wherein the second magnet (14) comprises a ring magnet having a central hole, and that the second surface is substantially planar, said gyroscopic top (13) having a spindle (18) rigidly affixed to the second magnet (14) in the central hole. 10 15
5. The device of claim 4, including means (16) for varying the weight of the gyroscopic top (13) to change the height above the first magnet (10) at which the second magnet (14) levitates. 20 25
6. The device of claim 5, wherein the varying means comprises at least one washer (16) having a central opening adapted to fit over the spindle (18).
7. The device of claim 6, wherein the washer (16) and the spindle (18) are made of a nonmagnetic material. 30
8. The device of claim 1 including a lifter plate (11) made of a nonmagnetic material.
9. The device of claim 1, wherein the first and the second magnet (10; 14) each are permanent magnets. 35
10. The device of claim 1, including a bore disposed through the geometric center of the first magnet (10).
11. The device of claim 1, including a third magnet (28) having a third surface and being positioned adjacent the geometric center of the first magnet (10), said third magnet being magnetized normal to the third surface such that the third surface has a polar orientation opposite the polar orientation of the first surface of the first magnet. 40 45
12. The device of claim 11, wherein the third magnet (28) is an electromagnet.
13. The device of claim 11, wherein the third magnet (28) is a permanent magnet. 50
14. The device of claim 1, wherein the first magnet (10) is an electromagnet.
15. A method of gyroscopically levitating a magnet comprising the steps of:
- supporting on a horizontal surface (T) a first magnet (10) having a first axis and a substantially planar upper surface, said first magnet being magnetized normal to the upper surface and parallel to the first axis such that the upper surface has a polar orientation; placing a non-magnetic lifter plate (11) over the upper surface of the first magnet; placing a second magnet (14) having a second axis and a lower surface on the lifter plate, said second magnet being magnetized normal to the lower surface and parallel to the second axis such that the lower surface has the same polar orientation as the upper surface of the first magnet; spinning the second magnet about the second axis while it is on the lifter plate; substantially aligning the second axis of the spinning second magnet with the first axis of the first magnet; raising the lifter plate vertically upwardly from the first magnet until the spinning second magnet levitates above the lifter plate and the upper surface of the first magnet; and removing the lifter plate from between the first and second magnets.
16. The method of claim 15, wherein the spinning step comprises manually spinning said second magnet (14). 30
17. The method of claim 15, wherein the raising step comprises manually raising the lifter plate (11), and wherein the removing step comprises manually removing the lifter plate. 35
18. The method of claim 15, wherein the first magnet (10) has a polygonal periphery. 40
19. The method of claim 18 wherein the polygonal periphery of the first magnet (10) is square. 45
20. The method of claim 15, including the step of placing a third magnet (28) adjacent the geometric center of the first magnet, said third magnet having a polar orientation opposite the polar orientation of the first magnet. 50

Patentansprüche

1. Magnetische Levitationseinrichtung mit einer Basis, die einen ersten Magnet enthält, und einem Kreisel, der einen zweiten Magnet besitzt, zur rotierenden Bewegung des Kreisels über dem und im Abstand vom Basismagneten, wenn der Kreisel gedreht wird, dadurch gekennzeichnet, dass der erste Magnet (10) eine im wesentlichen ebene erste Fläche mit einer ersten Achse und einem polygonalen

- Umfang besitzt, wobei der erste Magnet (10) senkrecht zur ersten Fläche und parallel zur ersten Achse magnetisiert ist, so dass die erste Fläche eine erste polare Orientierung hat, und dass der zweite Magnet (14) eine zweite Achse und eine zweite Fläche besitzt, wobei der zweite Magnet (14) senkrecht zur zweiten Fläche und parallel zur zweiten Achse magnetisiert ist, so dass die zweite Fläche des zweiten Magnets (14) die gleiche polare Orientierung wie die erste Fläche des ersten Magnets (10) hat, und Mittel (13) zum Rotieren des zweiten Magnets um die zweite Achse.
2. Vorrichtung nach Anspruch 1, bei welcher der Umfang des ersten Magnets (10) rechteckig ist.
3. Vorrichtung nach Anspruch 1, bei welcher der erste und der zweite Magnet (10; 14) jeweils keramische Magneten enthalten.
4. Vorrichtung nach Anspruch 1, bei welcher der zweite Magnet (14) einen Ringmagnet mit einem zentralen Loch besitzt und die zweite Fläche im wesentlichen eben ist, wobei der Kreisel (13) eine Spindel (18) besitzt, die in dem zentralen Loch starr mit dem zweiten Magnet (14) verbunden ist.
5. Vorrichtung nach Anspruch 4 mit Mitteln (16) zur Veränderung des Gewichts des Kreisels (13), um die Höhe zu verändern, in welcher der zweite Magnet (14) über dem ersten Magnet (10) schwebt.
6. Vorrichtung nach Anspruch 5, bei welcher die Veränderungsmittel mindestens eine Lochscheibe (16) mit einer zentralen Öffnung aufweisen, die zur Passung über der Spindel (18) ausgebildet ist.
7. Vorrichtung nach Anspruch 16, bei welcher die Lochscheibe (16) und die Spindel (18) aus einem nicht-magnetischen Material gefertigt sind.
8. Vorrichtung nach Anspruch 1 mit einer Hebeplatte (11), die aus einem nicht-magnetischen Material gefertigt ist.
9. Vorrichtung nach Anspruch 1, bei welcher der erste und zweite Magnet (10; 14) jeweils Permanentmagneten sind.
10. Vorrichtung nach Anspruch 1 mit einer Bohrung durch die geometrische Mitte des ersten Magneten (10).
11. Vorrichtung nach Anspruch 1 mit einem dritten Magnet (28), der eine dritte Fläche hat und benachbart zur geometrischen Mitte des ersten Magneten (10) angeordnet ist, wobei der dritte Magnet senkrecht zur dritten Fläche magnetisiert ist, so dass die dritte Fläche eine der polaren Orientierung der ersten Fläche des ersten Magneten entgegengesetzte polare Orientierung hat.
- 5 12. Vorrichtung nach Anspruch 11, bei welcher der dritte Magnet (28) ein Elektromagnet ist.
13. Vorrichtung nach Anspruch 11, bei welcher der dritte Magnet (28) ein Permanentmagnet ist.
- 10 14. Vorrichtung nach Anspruch 1, bei welcher der erste Magnet (10) ein Elektromagnet ist.
- 15 15. Verfahren zum gyroskopischen Schweben eines Magneten mit den Schritten:
- 20 Abstützen eines ersten Magnets (10), der eine erste Achse und eine im wesentlichen ebene obere Fläche hat, auf einer horizontalen Fläche (T), wobei der erste Magnet senkrecht zur oberen Fläche und parallel zur ersten Achse magnetisiert ist, so dass die obere Fläche eine polare Orientierung hat;
- 25 Anordnen einer nicht-magnetischen Hebeplatte (11) über der oberen Fläche des ersten Magneten; Anordnung eines zweiten Magneten (14) mit einer zweiten Achse und einer unteren Fläche auf der Hebeplatte, wobei der zweite Magnet senkrecht zur unteren Fläche und parallel zur zweiten Achse magnetisiert ist, so dass die untere Fläche die gleiche polare Orientierung wie die obere Fläche des ersten Magneten besitzt;
- 30 Drehen des zweiten Magneten um die zweite Achse, während er sich auf der Hebeplatte befindet; Ausrichten der zweiten Achse des drehenden zweiten Magneten im wesentlichen mit der ersten Achse des ersten Magneten;
- 35 Anheben der Hebeplatte senkrecht nach oben vom ersten Magneten, bis der drehende zweite Magnet über der Hebeplatte und der oberen Fläche des ersten Magneten schwebt; und Entfernen der Hebeplatte aus dem Raum zwischen dem ersten und zweiten Magneten.
- 40 16. Verfahren nach Anspruch 15, bei welchem der Drehschritt ein manuelles Drehen des zweiten Magneten (14) umfasst.
- 45 17. Verfahren nach Anspruch 15, bei welchem der Hebeschritt ein manuelles Heben der Hebeplatte (11) umfasst, und wobei der Entfernungsschritt das manuelle Entfernen der Hebeplatte umfasst.
- 50 18. Verfahren nach Anspruch 15, bei welchem der erste Magnet (10) einen polygonalen Umfang besitzt.
- 55 19. Verfahren nach Anspruch 18, bei welchem der po-

- lygonale Umfang des ersten Magneten (10) recht-eckig ist.
- 20.** Verfahren nach Anspruch 15 mit dem Schritt der Anordnung eines dritten Magneten (28) benachbart zur geometrischen Mitte des ersten Magneten, wobei der dritte Magnet eine polare Orientierung ent-gegengesetzt der polaren Orientierung des ersten Magneten besitzt.
- Revendications**
- 1.** Dispositif de lévitation magnétique comprenant une base englobant un premier aimant, et une toupie gyroscopique englobant un deuxième aimant, pour faire tourner la toupie gyroscopique au-dessus de l'aimant de base, et d'une façon distancée de celui-ci lors de la rotation de la toupie gyroscopique, caractérisé en ce que le premier aimant (10) comporte une première surface pratiquement plane avec un premier axe et une périphérie polygonale, ledit premier aimant (10) ayant un champ magnétique perpendiculaire à la première surface et parallèle au premier axe, de sorte que la première surface a une première orientation polaire; et en ce que le deuxième aimant (14) comporte un deuxième axe et une deuxième surface, ledit deuxième aimant (14) ayant un champ magnétique perpendiculaire à la deuxième surface et parallèle au deuxième axe, de sorte que la deuxième surface du deuxième aimant (14) a la même orientation polaire que la première surface du premier aimant (10), un moyen (18) étant prévu pour faire tourner ledit deuxième aimant autour du deuxième axe.
 - 2.** Dispositif selon la revendication 1, dans lequel la périphérie du premier aimant (10) est carrée.
 - 3.** Dispositif selon la revendication 1, dans lequel les premier et deuxième aimants (10; 14) comprennent chacun des aimants céramiques.
 - 4.** Dispositif selon la revendication 1, dans lequel le deuxième aimant (14) comprend un aimant annulaire avec un trou central, la deuxième surface étant pratiquement plane, ladite toupie gyroscopique (13) comportant une broche (18) fixée fermement au deuxième aimant (14) dans le trou central.
 - 5.** Dispositif selon la revendication 4, englobant un moyen (16) pour faire varier le poids de la toupie gyroscopique (13) pour changer la hauteur de lévi-tation du deuxième aimant (14) au-dessus du pre-mier aimant (10).
 - 6.** Dispositif selon la revendication 5, dans lequel le moyen de variation comprend au moins une rondel-le (16) comportant une ouverture centrale, destinée à être ajustée au-dessous de la broche (18).
 - 7.** Dispositif selon la revendication 6, dans lequel la rondelle (16) et la broche (18) sont composées d'un matériau non magnétique.
 - 8.** Dispositif selon la revendication 1, englobant un plateau relevable (11) composé d'un matériau non magnétique.
 - 9.** Dispositif selon la revendication 1, dans lequel les premier et deuxième aimants (10; 14) sont chacun un aimant permanent.
 - 10.** Dispositif selon la revendication 1, englobant un alésage traversant le centre géométrique du pre-mier aimant (10).
 - 11.** Dispositif selon la revendication 1, englobant un troisième aimant (28), comportant une troisième surface et étant agencé près du centre géométrique du premier aimant (10), ledit troisième aimant ayant un champ magnétique perpendiculaire à la troisiè-me surface, de sorte que la troisième surface a une orientation polaire opposée à l'orientation polaire de la première surface du premier aimant.
 - 12.** Dispositif selon la revendication 11, dans lequel le troisième aimant (28) est un électro-aimant.
 - 13.** Dispositif selon la revendication 11, dans lequel le troisième aimant (28) est un aimant permanent.
 - 14.** Dispositif selon la revendication 1, dans lequel le premier aimant (10) est un électro-aimant.
 - 15.** Procédé de lévitation gyroscopique d'un aimant, comprenant les étapes ci-dessous:
 - 40** support sur une surface horizontale (T) d'un premier aimant (10) comportant un premier axe et une surface supérieure pratiquement plane, ledit premier aimant ayant un champ magnéti-que perpendiculaire à la surface supérieure et parallèle au premier axe, de sorte que la surfa-ce supérieure a une orientation polaire;
 - 45** agencement d'un plateau relevable non ma-gnétique (11) au-dessus de la surface supé-rieure du premier aimant; agencement d'un deuxième aimant (14) comportant un deuxième axe et une surface inférieure sur le plateau re-levable, ledit deuxième aimant ayant un champ magnétique perpendiculaire à la surface infé-rieure et parallèle au deuxième axe, de sorte que la surface inférieure a la même orientation polaire que la surface supérieure du premier aimant;
 - 50**
 - 55**

mise en rotation rapide du deuxième aimant autour du deuxième axe pendant son agencement sur le plateau relevable; alignement substantiel du deuxième axe du deuxième aimant en rotation rapide avec le premier axe du premier aimant; soulèvement du plateau relevable verticalement vers le haut par rapport au premier aimant, jusqu'au moment de la lévitation du deuxième aimant en rotation rapide au-dessus du plateau relevable et de la surface supérieure du premier aimant; et enlèvement du plateau relevable entre les premier et deuxième aimants.

5

10

15

16. Procédé selon la revendication 15, dans lequel l'étape de mise en rotation rapide comprend la mise en rotation rapide manuelle dudit deuxième aimant (14).

20

17. Procédé selon la revendication 15, dans lequel l'étape de soulèvement comprend le soulèvement manuel du plateau relevable (11) et dans lequel l'étape d'enlèvement comprend l'enlèvement manuel du plateau relevable.

25

18. Procédé selon la revendication 15, dans lequel le premier aimant (10) a une périphérie polygonale.

19. Procédé selon la revendication 18, dans lequel la périphérie polygonale du premier aimant (10) est carrée.

30

20. Procédé selon la revendication 15, englobant l'étape d'agencement d'un troisième aimant (28) près du centre géométrique du premier aimant, ledit troisième aimant ayant une orientation polaire opposée à l'orientation polaire du premier aimant.

35

40

45

50

55

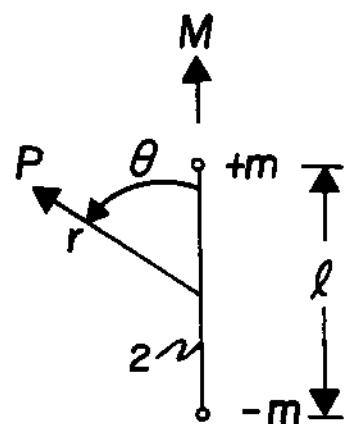


FIG. 1.

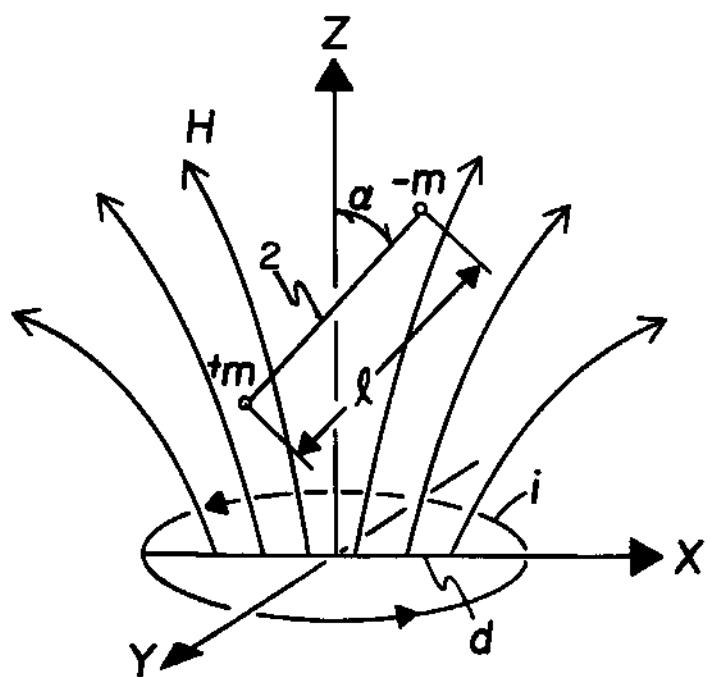


FIG. 2.

FIG. 4.

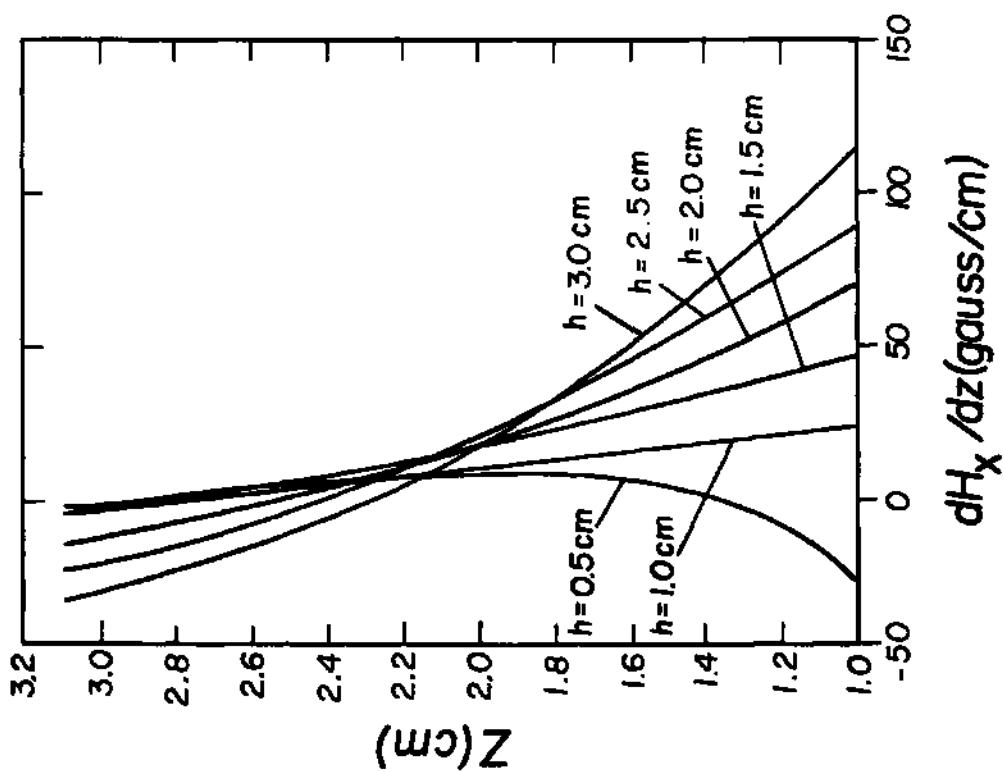
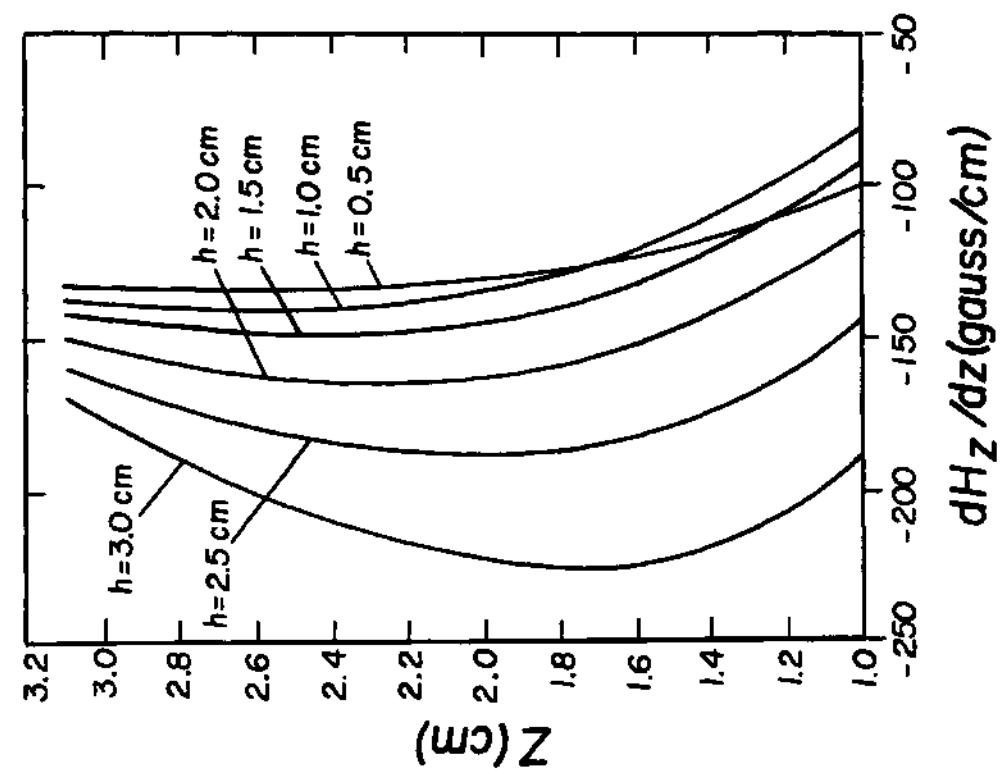
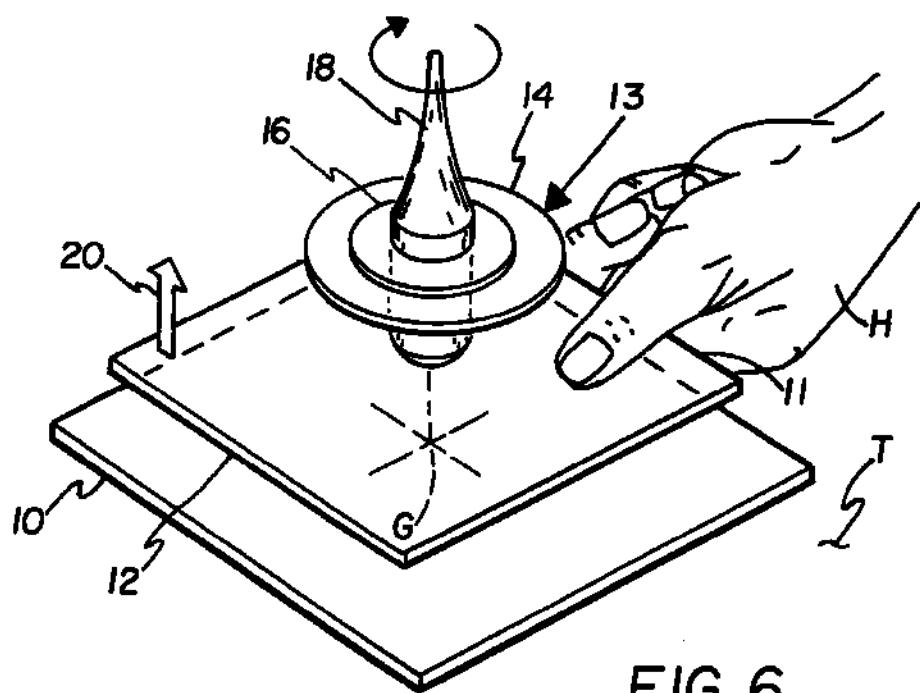
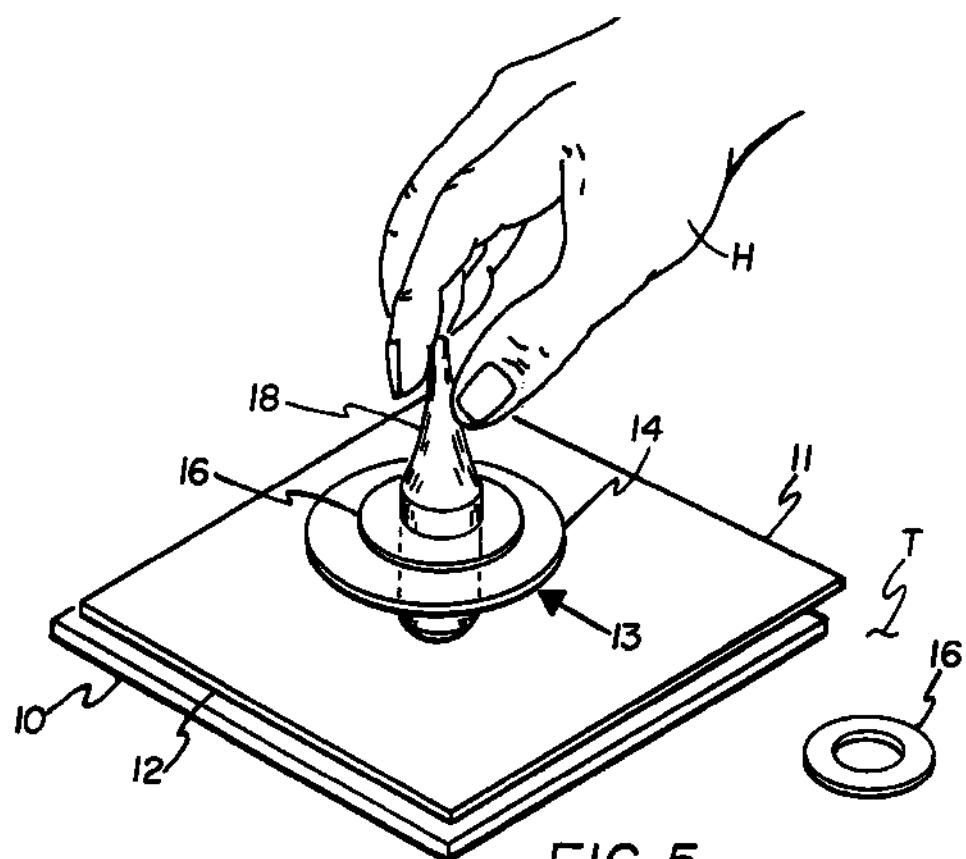


FIG. 3.





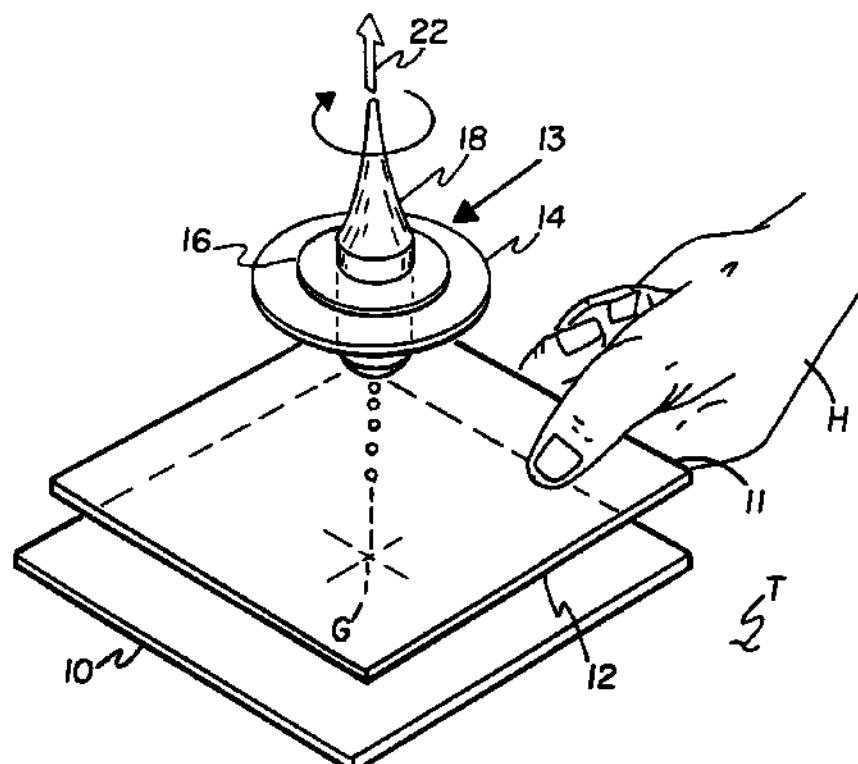


FIG. 7.

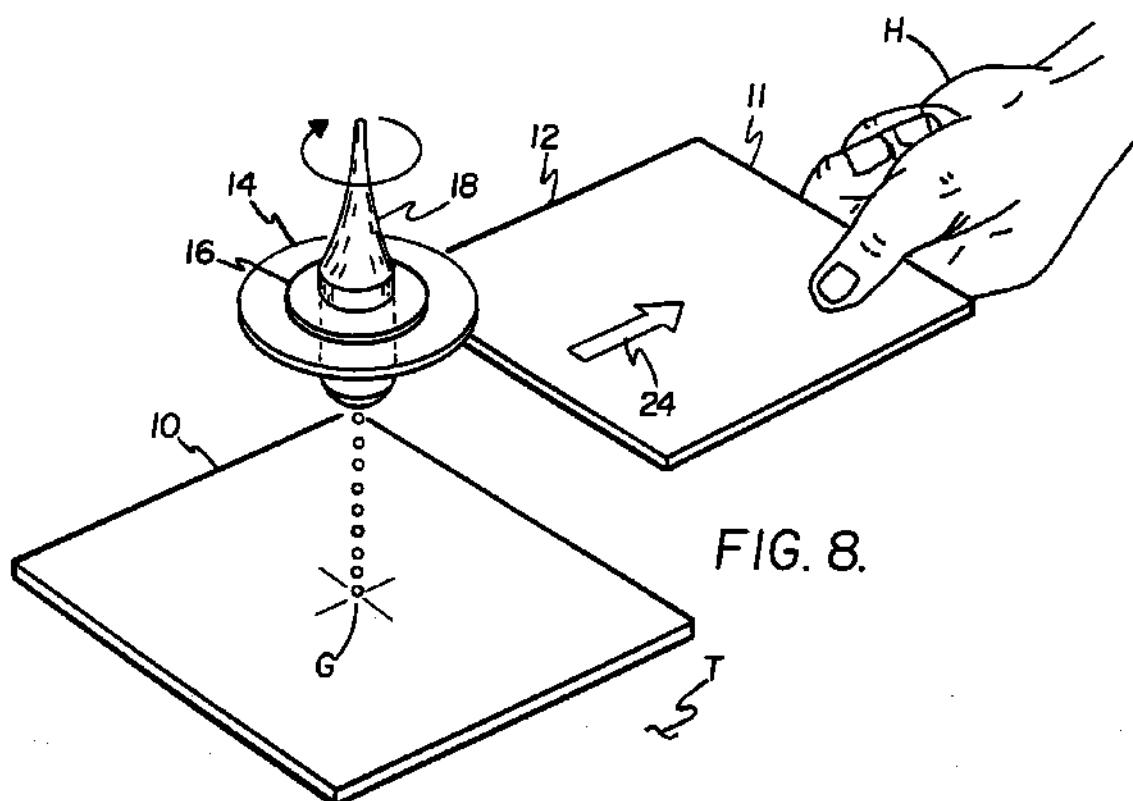


FIG. 8.

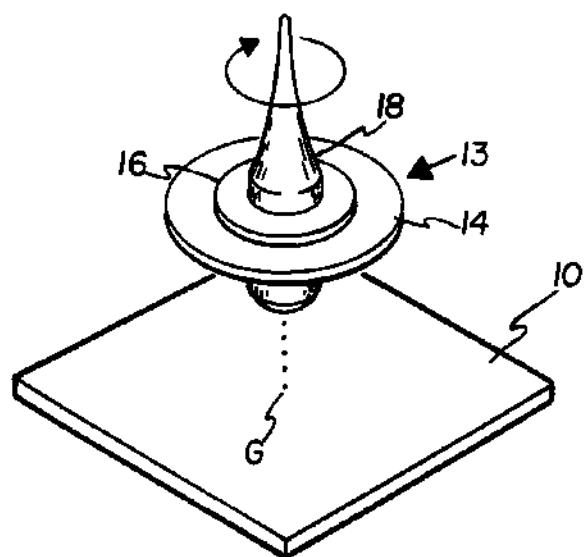


FIG. 9.

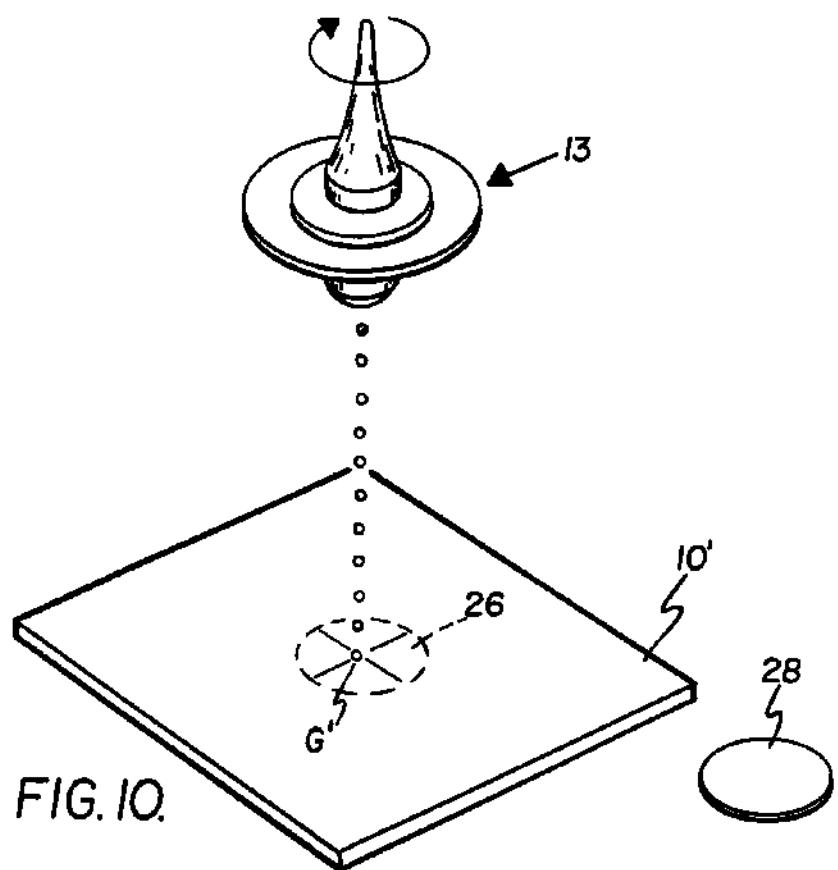


FIG. 10.

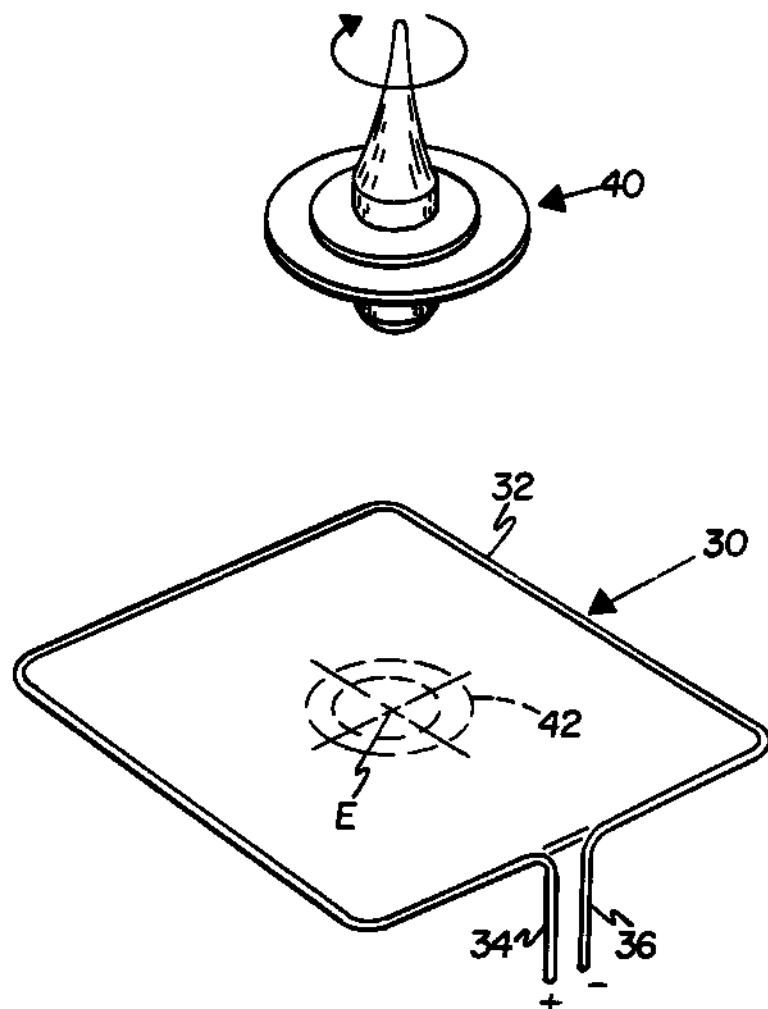


FIG. 11.